

Declaration of conformity for the European Community

ATLINKS declares that Temporis IP151 telephone complies with the relevant basic requirements and provisions of the European directive 1999/5/CE. You can download the declaration of conformity from the following address: www.alcatel-business.com.

The CE logo shown on the products indicates that they are compliant with the basic requirements of all the applicable directives.



Environment



This symbol means that your inoperative electronic appliance must be collected separately and not mixed with the household waste. The European Union has implemented a specific collection and recycling system for which producers' are responsible.

This appliance has been designed and manufactured with high quality materials and components that can be recycled and reused.

Electrical and electronic appliances are liable to contain parts that are necessary in order for the system to work properly but which can become a health and environmental hazard if they are not handled or disposed of in the proper way. Consequently, please do not throw out your inoperative appliance with the household waste. If you are the owner of the appliance, you must deposit it at the appropriate local collection point or leave it with the vendor when buying a new appliance.

(a)- If you are a professional user, please follow your supplier's instructions.

(b)- If the appliance is rented to you or left in your care, please contact your service provider.

Please help us protect the environment in which we live!

Notice of copyright and trademarks

Copyright © 2016 ATLINKS. All rights reserved. ATLINKS reserves the right to change the technical specifications of its products without prior notice, so as to make technical improvements or respect new regulations.


Alcatel and Temporis are registered trademarks. Alcatel logo and Alcatel name are trademarks of Alcatel-Lucent and used under license by ATLINKS.

Model : IP151
A/W No.: 10001419 Rev.0 (EN)
Printed in China

ALCATEL


home & business phones

Temporis IP151 QUICK START GUIDE

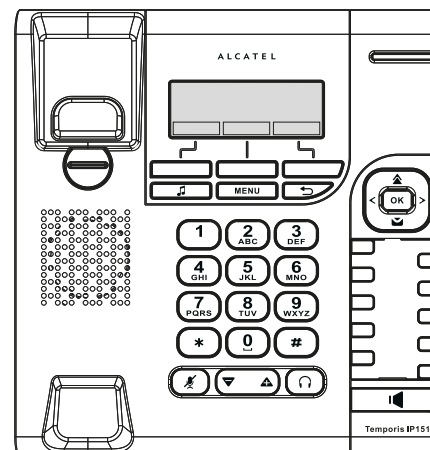

- Visual indicator key
- Line keys
- Navigation keys (up, down, left, right) + shortcuts to other functions
- OK key
- In communication mode: mute/unmute a call
- Access to redial list
- Headset key
- Access to voice mail
- During ringing : increase or decrease ringer volume
In communication : increase or decrease earpiece, headset or handsfree volume
- Activate/deactivate handsfree

- Soft keys
- Call hold
- Menu key
- Back key
- Enable/disable key lock (long press)

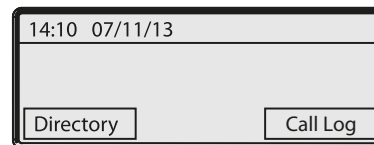

Visual indicator description

Orange	There are messages waiting or missed calls
Flashing orange	Mute is activated
Green	Off hook
Flashing green	Incoming call
Slow flashing green	Headset is activated
Red	No network or no SIP service

Display icon description

	Line registered		Call in
	Line unregistered		Call out
	Line disabled		Call forward
	Handsfree mode activated		Do not disturb function activated
	In headset mode		Voicemail
	Missed calls		Internet is disconnected
	Ringer off		Key lock enabled

Phone web interface

1. Press or > **2.Status** > **1. Network.** > **1. IPV4** or **2. IPV6** (depending of your network) to check phone IP address.
2. Open a web browser on your computer. Enter http:// and the IP address in the address bar and validate.
3. Default login and password are « user/user » for users and « admin/admin » for administrator.
4. Minimum config is sip account. Check administrator guide or details.

Language setting

- Press soft key -> **3.User settings** > **1.Preferences** > **1.Language.**
- Select the desired language and press .

Making a call

- **Pre-dialling** : enter the phone number and pick up the handset.
- **Direct dialling** : lift the handset and enter the phone number.
- **Handsfree** : enter phone number and press or vice versa .
- **Headset** : enter phone number and press or vice versa.

Accepting a call

- **With the handset** : pick up the handset.
- **With a headset** : press .
- **With the handsfree** : press .

Putting a call on hold

- Press key . To retrieve the call press **Resume** soft key.

Note : with more than one active call, select desired call with the navigator keys and use the corresponding soft key to hold or resume.

3-party conference

1. Once in line with 1st caller, press **Conf** soft key, 1st caller is put on hold.
2. Then call the 2nd number.
3. After, 2nd call is established, press **Conf** soft key to set up the conference.

Call transfer

Attended transfer :

1. Press **Transfer** soft key during the active conversation, the call is put on hold.
2. Dial the second telephone number and press **Dial** soft key.
3. When the call is answered, then press **Transf** soft key to complete the operation.

Blind transfer :

1. Press **Transfer** soft key during the active conversation, the call will be on hold.
2. Dial 2nd phone number, then press **Blind** soft key to transfer the call.

Call forward

1. Press -> **1. Features** -> **1.Call** -> **2. Call Forward.**
2. Select the line, the type of forward, enter the destination number and status and **Save.**

Call log

1. Press **Call Log** soft key or -> **1.Features** -> **3. Call history** -> **1.All calls** or **2. Missed calls.**
2. Scroll through the list using .
3. To dial an entry, press **Dial** soft key or pickup handset or press or .

Phonebook

Access phonebook :

1. Press **Directory** soft key.
 2. Select **Local** or other phonebook and press .
- To dial an entry, press **Dial** soft key or pickup handset or press or .

Add new entry :

1. Press **Directory** soft key -> **1.Local** -> Press -> press navigator right key twice -> Press **Add.**
2. Enter name and number and press **Save** soft key.

Note: use central soft key to toggle between lower/upper case or digits

Direct memory and speed dial keys

Program direct memory keys :

1. You can use the phone web interface to configure these keys.

Program speed dial keys :

1. Press -> **1.Features** -> **5. Speed dial** -> select in the list the desired key (0 to 9) with the navigator -> -> press **Add** -> enter name and number-> press **Save**. When long press on a key, you directly call the stored contact.



Redial

1. Press , select the desired call and press **Dial** soft key or pickup handset or press or .

Do not disturb

1. Press -> **1.Features** -> **1.Call** -> **1.Do not disturb.**
2. Select the line and status, and press **Save** soft key.

Voice mail

1. To access your voice mailbox, press .
2. Select the line and press to call .

Note : An icon will be shown at the right hand side of a line in this menu when there are pending messages.

Phone lock

1. Long press on to enable keypad lock
2. Long press on to disable key lock, then enter PIN code (1234 by default) when requested.