

Declaration of conformity for the European Community



The CE logo printed on the products indicates the conformity with all essential requirements and applicable directives.

You can download the declaration of conformity from the following address:

www.alcatel-business.com.

Environment



This symbol means that your inoperative electronic appliance must be collected separately and not mixed with the household waste. The European Union has implemented a specific collection and recycling system for which producers' are responsible.

This appliance has been designed and manufactured with high quality materials and components that can be recycled and reused.

Electrical and electronic appliances are liable to contain parts that are necessary in order for the system to work properly but which can become a health and environmental hazard if they are not handled or disposed of in the proper way. Consequently, please do not throw out your inoperative appliance with the household waste. If you are the owner of the appliance, you must deposit it at the appropriate local collection point or leave it with the vendor when buying a new appliance.

(a)- If you are a professional user, please follow your supplier's instructions.

(b)- If the appliance is rented to you or left in your care, please contact your service provider.

Please help us protect the environment in which we live!

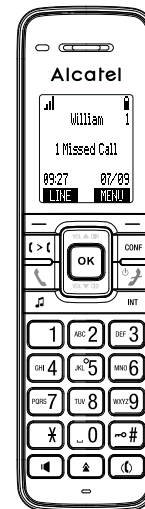
Notice of copyright and trademarks

Copyright ©2017 ATLINKS. All rights reserved. ATLINKS reserves the right to change the technical specifications of its products without prior notice, so as to make technical improvements or respect new regulations.

Alcatel is a trademark of Nokia, used under license by ATLINKS.

Alcatel

Alcatel IP2215 QUICK START GUIDE



- Message Waiting visual indicator
- Left softkey : dialing line selection
- Right softkey : menu
- Off hook
- On hook/back
 - long press: on/off handset



- Navigator :
- Central key : menu/OK
 - Up key :
 - In idle mode : directory
 - In communication : increase earpiece, headset or handsfree volume
 - Down key :
 - In idle mode : call log
 - In communication : decrease earpiece, headset or handsfree volume

- Call transfer
- Call hold
- Handsfree
- Change text input mode (ABC/abc/Abc)
- Redial list
- CONF Conference
- INT Intercom
- Lock keypad
- Mute

Display icon description

	Handsfree mode activated		Call forward
	In headset mode		Do not disturb function activated
	Ringer off		Voicemail
	Range		Battery Status
	Line disabled		Line registered
	Line unregistered		Missed calls
	Call in		Call out
	Mute activated		

LED base description

	Steady amber	Base is connected to network or router
	Steady amber	Registered to VoIP server
	Blinking amber	DECT registration mode





Phone web interface

1. Check phone IP address pressing **MENU > Status > Network > IPv4 or IPv6**.
2. Open a web browser on your computer. Enter http:// and the IP address in the address bar and validate.
3. Default login and password are « user/user » for users and « admin/admin » for administrator
4. Minimum config is sip account. Check administrator guide for details.




Language setting

- Press **MENU > User settings > Language**.
- Select the desired language and press **OK**.

Making a call


- **Pre-dialling** : enter the phone number and press .
- **Direct dialling** : press  and enter the phone number.
- **Handsfree** : enter phone number and press  or vice versa.
- **Headset** : connect headset, enter phone number and press .

Accepting a call

- **With the handset** : press .
- **With a headset** : press .
- **With the handsfree** : press .

Note : to accept a waiting call, press **ANSWER** softkey.

Putting a call on hold

- Press  key. To retrieve the call press **RESUME** soft key.

Note : with more than one active call, you can use **NEXT** softkey to toggle and use the corresponding soft key to hold or resume.



3-party conference



1. Once in line with 1st caller, press **CONF** key, 1st caller is put on hold.
2. Select **A new party** or **A handset party** soft key and dial phone number.
3. After 2nd call is established, press **CONF** soft key to set up the conference.

Note : if you already have two active calls, you can create a conference with your two counterparts by pressing **CONF**.



Call transfer

Attended transfer :




1. Press  >  key during the active conversation, the call is put on hold.
2. Select **A new party** or **A handset party** soft key and dial the second telephone number.
3. When the call is answered, then press **TRANS.** soft key to complete the operation.

Note : if you already have two active calls, you can transfer the call to your two counterparts by pressing  > .

Blind transfer :

1. Press  >  key during the active conversation, the call is put on hold.
2. Select **A new party** or **A handset party** soft key, select **BLIND** soft key and enter second telephone number. Call is automatically transferred.

Redial


1. Press , select the desired call and press **DIAL** soft key or press  or .

Call forward

1. Press **MENU > Features > Call Forward**.
2. Select the line, the type of forward, status (on/off), then enter the destination number and **SET**.

Call list



1. Press down navigation key or **MENU > Call history > 1. Missed Calls** or **2. Received Calls** or **3. Dialed Calls**.

2. Scroll through the list using .

3. To dial an entry, press **DIAL** soft key or press  or .

Phonebook

Access phonebook :

1. Press up navigation key.
2. Select **Local directory** or other phonebook and press **OK** or **REVIEW** soft key.
3. To dial an entry, press **DIAL** soft key or press  or .

Add a new entry :

1. Press up navigation key > underline **Local directory** or other phonebook > press **OPTION** softkey > Press **Add new**.
2. Enter name and number and press **SAVE** soft key.

Do not disturb


1. Press **MENU > Features > DND**.
2. Select the line. Change status with **OK** key, and press **SET** soft key.

Voice mail

1. Press **MENU > Message**.
2. Select the line and press **OK**.

Note : an icon will be shown at the right hand side of a line in this menu when there are pending messages.

Registration

1. **Base** : make a long press on .



2. **Handset** : press **MENU > User settings > Registration**.
3. Select **Handset**.
4. Perform the steps displayed on screen.